



Technology that works fast

TOSHIBA
AIR CONDITIONING

**Hi-Wall
Split Systems**



Toshiba Air Conditioning, we care about better air.



Our products comply with RoHS regulations, which ensures the exclusion of restricted substances (ie. lead, cadmium, mercury, others) in the materials of every single component.



By using plastic that can be recycled, we aim to minimise the impact of waste electrical goods on the environment.



Increased cost savings have been made by using digital technology. This can provide superior control and cost efficiency by utilising a DC inverter compressor as opposed to a AC fixed speed compressor. This environmentally sustainable DC compressor results in a power saving of up to 50%* with the added benefit of super-accurate rotation and quieter operation.

*13k Inverter vs. fixed-speed class A product



Our philosophy.


Toshiba's origins go back to 1875 where the Tanaka Engineering Works was established as Japan's first manufacturer of telegraphic equipment. For the last 30 years Toshiba has studied, designed and innovated for the air conditioning market.

For Toshiba quality is a priority. Today and even tomorrow, this will be the real difference between us and many other air conditioning manufacturers. This is a philosophy that forms the basis of every air conditioner that leaves our production lines. No compromise – only quality.

Combining high power with high efficiency.

The Toshiba Air Conditioning Hybrid Inverter.

The hybrid inverter integrates two distinct compressor control modules to ensure constant natural comfort which is achieved with maximum energy efficiency. PAM (Pulse Amplitude Modulation) provides the highest levels of power for when you need to get cool (or warm) fast, while PWM (Pulse Width Modulation) ensures the desired room temperature and optimum energy efficiency. The Toshiba Inverter system features the best of both.

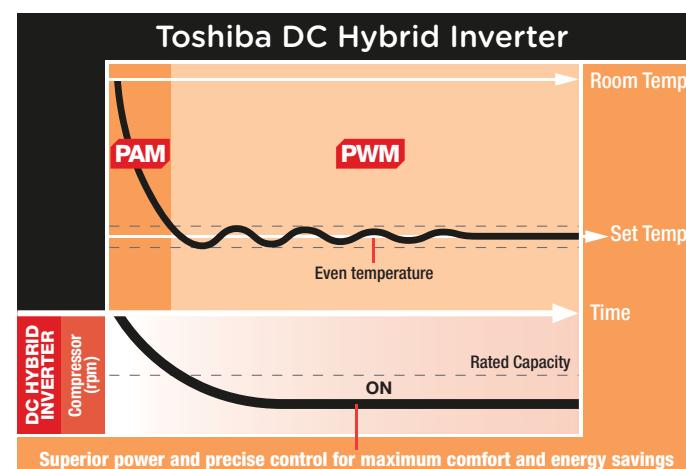

PAM High power

PAM works like a **turbo** engine in a car. It will set a compressor at the maximum power, providing fast cooling in order to achieve the desired room temperature when the air conditioner is switched on.

PWM High efficiency

PWM helps to balance the compressor speed revolution, either high speed when providing fast cooling, or slow speed when maintaining room temperature. So, like **cruise control** in a car, it results in significantly less consumption.


The Toshiba Air Conditioning DC Twin-Rotary Compressor.

High efficiency

This compressor enables the adoption of a high-pressure refrigerant. High efficiency is evident in low speed operation ranges. It can reduce energy consumption when operated in long stable conditions.

Rotating with two rollers at the same time makes accurate compressor rotation possible with less energy loss.

As a result, it offers a great reduction in energy consumption with powerful operation.

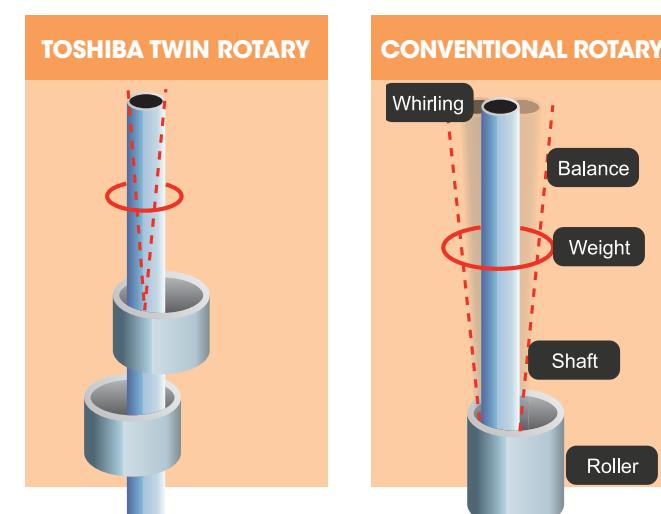

High reliability and low noise


The enhanced DC Twin-Rotary Compressor delivers stable performance with minimum friction. It's ideal for noise-sensitive applications as the sound of the outdoor unit is almost imperceptible.



When technology meets comfort.

Toshiba was the first company to incorporate inverter technology into air conditioning systems in 1981 and since then we have always maintained a technological advantage.

The development of the exclusive DC Hybrid Inverter system has reaffirmed this ability to innovate and maintain technological leadership in a fast-growing market.

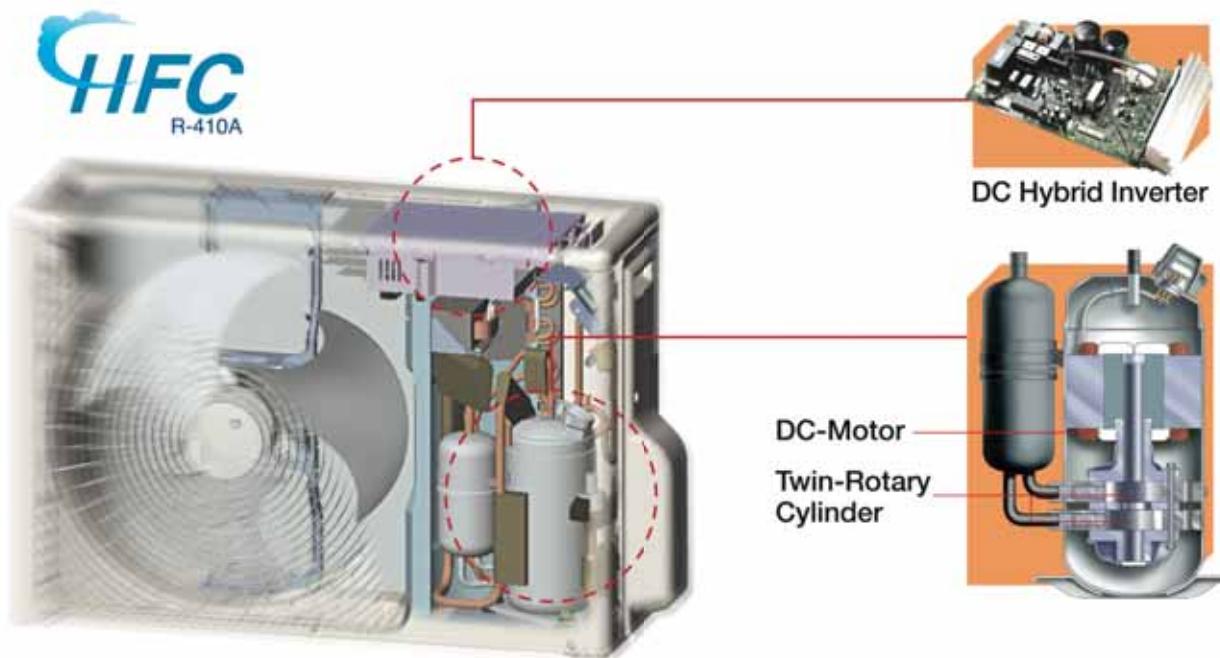

Digital Inverter range.



Innovative technology, ingenious features and attractive design – Toshiba's N3 series raises the standard of air conditioning with a new level of comfort. Comfort that comes with a whisper-quiet operation and optimum airflow management system, whilst the advanced filtration system allows you to breathe cleaner air.

Quiet operation
Rapid heat and cool function which increases power temporarily to achieve desired temperature before returning to normal power
5 year warranty for consumer confidence
Low maintenance
Wired or wireless control options
Reverse cycle (heating and cooling)
Powerful operation
Easy to install
DC inverter system, designed to use electricity efficiently and effectively
Easy to use controller



Fan speed (powerful & precise).



Toshiba air conditioners have 6 fan speed settings, including Auto Fan and Hi-Power modes. Choose from a gentle airflow, right up to the full cooling or heating of Hi-Power mode.



Hi-Power.



Hi-Power mode makes your room cool faster, yet is still quiet while operating.



When you come home on a hot day, just press the Hi-Power button and Toshiba's extra airflow will rapidly deliver extra cooling throughout the room without making any extra undesired noise.



Eco-logic.



Achieve energy-savings of up to 25% compared with standard setting without sacrificing comfort.

COOLING


The temperature is raised by 1°C after 1 hour and another degree after 2 hours, which will be maintained until switching off.

HEATING

The temperature is lowered by 1°C after 1 hour and another degree after 2 hours, which will be maintained until switching off.



Large screen and easy to use symbols.



For simple and easy operation.



Optional wired or wireless controller.

- Basic functionality of the wired remote is the same as the wireless remote.
- Wires can be hidden behind wall.
- Wired remote secured to the wall – never lose the controller again.
- Wired controller is ideal in cases where wireless controller may cause radio frequency interference.
- Ideal for use in both residential and commercial applications such as aged care, hospitals, hotels, schools and office buildings.



Specifications.

UNITS		(R-410A) N3KV2 INVERTER MODELS						
INDOOR		RAS-10N3KV2-A RAS-13N3KV2-A RAS-16N3KV2-A RAS-18N3KV2-A RAS-22N3KV2-A RAS-24N3KV2-A						
OUTDOOR		RAS-10N3AV2-A RAS-13N3AV2-A RAS-16N3AV2-A RAS-18N3AV2-A RAS-22N3AV2-A RAS-24N3AV2-A						
Cooling Capacity - Rated	kW	2.5	3.4	4.4	5.0	6.0	7.1	
Cooling Capacity - Range	kW	1.1-3.1	2.0-4.1	0.8-5.0	1.1-6.0	1.2-6.7	1.5-7.7	
Power input - Cooling (min ~ rated ~ max)	kW	0.25-0.598-0.82	0.49-0.92-1.30	0.15-1.34-1.72	0.18-1.42-2.0	0.20-1.83-2.65	0.30-2.25-2.90	
Operating current - Cooling (min ~ rated ~ max)	A	1.36-2.89-3.75	2.80-4.20-6.31	0.88-6.06-7.62	1.06-6.41-8.90	1.16-8.19-11.78	1.78-10.30-12.85	
EER - Cooling (min ~ rated ~ max)		3.78-4.18-4.40	3.15-3.70-4.08	2.91-3.28-5.33	3.00-3.52-6.11	2.53-3.28-6.00	2.66-3.16-5.00	
AEER - Cooling		4.06	3.62	3.23	3.48	3.23	3.12	
Heating Capacity - Rated	kW	3.2	4.2	5.3	5.8	7.0	8.1	
Heating Capacity - Range	kW	0.9-4.8	1.8-5.6	0.9-6.3	0.8-6.3	1.0-7.5	1.6-9.0	
Power input - Heating (min ~ rated ~ max)	kW	0.17-0.75-1.40	0.38-1.12-1.69	0.15-1.50-1.98	0.14-1.56-1.70	0.18-1.98-2.21	0.30-2.45-3.30	
Operating current - Heating (min ~ rated ~ max)	A	0.92-3.51-6.21	2.11-5.01-7.55	0.89-6.71-8.77	0.84-6.97-7.58	1.06-8.87-9.79	1.81-11.20-14.62	
COP - Heating (min ~ rated ~ max)		3.43-4.27-5.29	3.31-3.75-4.74	3.18-3.53-6.00	3.71-3.72-5.71	3.39-3.54-5.56	2.73-3.31-5.33	
ACOP - Heating		4.17	3.69	3.48	3.67	3.49	3.28	
INDOOR UNIT	Airflow Volume - Cooling (h-l)	l/s	143-83	158-82	190-103	265-163	305-183	280-183
	Moisture removal	l/hr	1.5	2.0	2.5	2.8	3.5	3.8
	Sound Pressure - Cooling (h-l)	dB(A)	39-26	45-30	47-32	44-32	47-35	45-36
	Dimension (HxWxD)	mm	275x790x225	275x790x225	275x790x225	320x1050x243	320x1050x243	320x1050x243
	Net Weight	kg	10	10	10	13	13	13
	Sound Power - Cooling (h)	dB(A)	54	60	62	59	62	58
	Fan Motor Output	W	20	20	30	30	30	30
OUTDOOR UNIT	Dimension (HxWxD)	mm	550x780x290	550x780x290	550x780x290	550x780x290	630x800x300	890x900x320
	Net Weight	kg	33	37	38	41	43	65
	Sound Pressure - Cooling (h)	dB(A)	46	49	51	49	53	52
	Sound Power - Cooling (h)	dB(A)	62	64	66	64	68	65
	Operating range - Cooling	C	-10~46	-10~46	-10~46	-10~46	-10~46	-10~46
	Sound Pressure - Heating (h)	dB(A)	47	50	52	50	52	52
	Operating range - Heating	C	-15~24	-15~24	-15~24	-15~24	-15~24	-15~24
PIPE SIZE	Liquid Side	(mm/inch)	6.35(1/4")	6.35(1/4")	6.35(1/4")	6.35(1/4")	6.35(1/4")	9.52(3/8")
	Gas Side	(mm/inch)	9.52(3/8")	9.52(3/8")	12.70(1/2")	12.70(1/2")	12.70(1/2")	15.88(5/8")
	Maximum Piping Length	(m)	20	20	20	20	20	30
	Maximum Piping Height difference	(m)	10	10	10	10	10	20
	Chargeless Length	(m)	15	15	15	15	15	20
	Compressor type		DC Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary
	Power Supply	V/ph/Hz	220-240/1/50	220-240/1/50	220-240/1/50	220-240/1/50	220-240/1/50	220-240/1/50



Notice: Toshiba is committed to continuously improving its product to ensure the highest quality and reliability standards, and to meet local regulations and market requirements.

All features and specifications are subject to change without prior notice.

Note: All images provided in this catalogue are used for illustration purposes only.

Part number: 1014-062013 Date: July 2013

Equipment rates in accordance with
MEPS 3823.2-2011 E&OE

toshiba-aircon.com.au



TOSHIBA
AIR CONDITIONING